


Binary Input with manual operation, 8-fold, 24 V AC/DC, MDRC BE/S 8.24.1, 2CDG 110 055 R0011

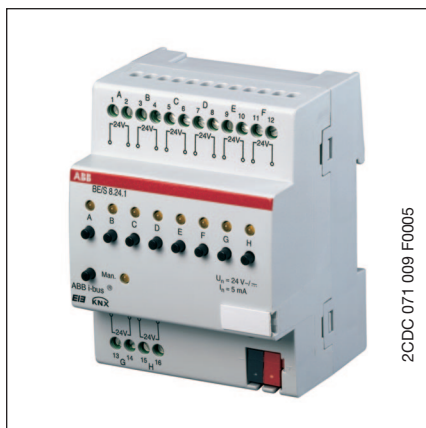

2CDC 071 009 F0005

The 8-fold Binary Input BE/S 8.24.1 with manual operation is a rail mounted device for insertion in the distribution board. The device is suitable for reading out 0...32 V AC/DC signals. The inputs are independent of one another.

Buttons on the front of the device can be used to simulate the input state. The status of the inputs are displayed by yellow LEDs.

The device is ready for operation after connection to the bus voltage. The Binary Input is parameterised via ETS2 V1.3a or higher. The connection to the bus is established using the front side bus connection terminal.

5

5

Technical data

Power supply	<ul style="list-style-type: none"> – Bus voltage – Current consumption, bus – Power consumption – Leakage loss, bus 	21 ... 32 V DC < 12 mA Max. 1.1 W Max. 250 W
Inputs	<ul style="list-style-type: none"> – Number – Permitted voltage range U_n – Input current I_n – Signal level for 0-signal – Signal level for 1-signal – Permitted cable lengths 	8 individual 0...32 V AC/DC Max. 5 mA 0...4 V AC/DC 9...32 V AC/DC ≤ 100 m with 1.5 mm ²
Connections	<ul style="list-style-type: none"> – EIB / KNX – Inputs 	via bus connection terminal, without screws using screw terminals
Connection terminals	<ul style="list-style-type: none"> – Screw terminals – Tightening torque 	0.2 ... 2.5 mm ² finely stranded 0.2 ... 4.0 mm ² single-core max. 0.6 Nm
Operating and display elements	<ul style="list-style-type: none"> – Programming LED (3) – Programming button (2) – Channel LED (8) – Manual operation button (9) – Manual/Automatic LED (Man.) (6) – Manual/Automatic button (Man.) (5) 	for assignment of the physical address for assignment of the physical address 1 LED per channel for display of the input state 1 button per channel for changing the input state 1 LED for display of the manual/automatic mode states 1 button for switchover of manual and automatic mode
Enclosure	<ul style="list-style-type: none"> – IP 20 	to DIN EN 60 529
Safety class	<ul style="list-style-type: none"> – II 	to DIN EN 61 140
Temperature range	<ul style="list-style-type: none"> – Operation – Storage – Transport 	– 5 °C...+ 45 °C – 25 °C...+ 55 °C – 25 °C...+ 70 °C
Design	<ul style="list-style-type: none"> – Modular installation device (MDRC) – Dimensions – Mounting width in space units – Mounting depth 	Modular installation device, ProM 90 x 72 x 67.5 mm (H x W x D) 4, 4 modules at 18 mm 67.5 mm
Installation	<ul style="list-style-type: none"> – On 35 mm mounting rail 	to DIN EN 60 715
Mounting position	<ul style="list-style-type: none"> – as required 	
Weight	<ul style="list-style-type: none"> – 0.2 kg 	
Housing/colour	<ul style="list-style-type: none"> – Plastic housing, grey 	
Approvals	<ul style="list-style-type: none"> – EIB / KNX to EN 50 090-1, -2 	Certification
CE mark	<ul style="list-style-type: none"> – in accordance with the EMC guideline and low voltage guideline 	
Halogen free	<ul style="list-style-type: none"> – Yes, conform to DIN VDE 0472 part 815 	

Application program	Max. number of communication objects	Max. number of group addresses	Max. number of associations
Binary, 8f24M/1	83	254	254

Note


The programming requires EIB Software Tool ETS2 V1.3a or higher. If ETS3 is used a “.VD3” type file must be imported. The application program is available in the ETS2 / ETS3 at ABB/Input/Binary Input 4-fold.

Detailed information about the application can be found in the product-manuals for the „Binary Input BE/S“. This manual can be free downloaded under www.ABB.de/EIB.

Circuit diagram


5

5

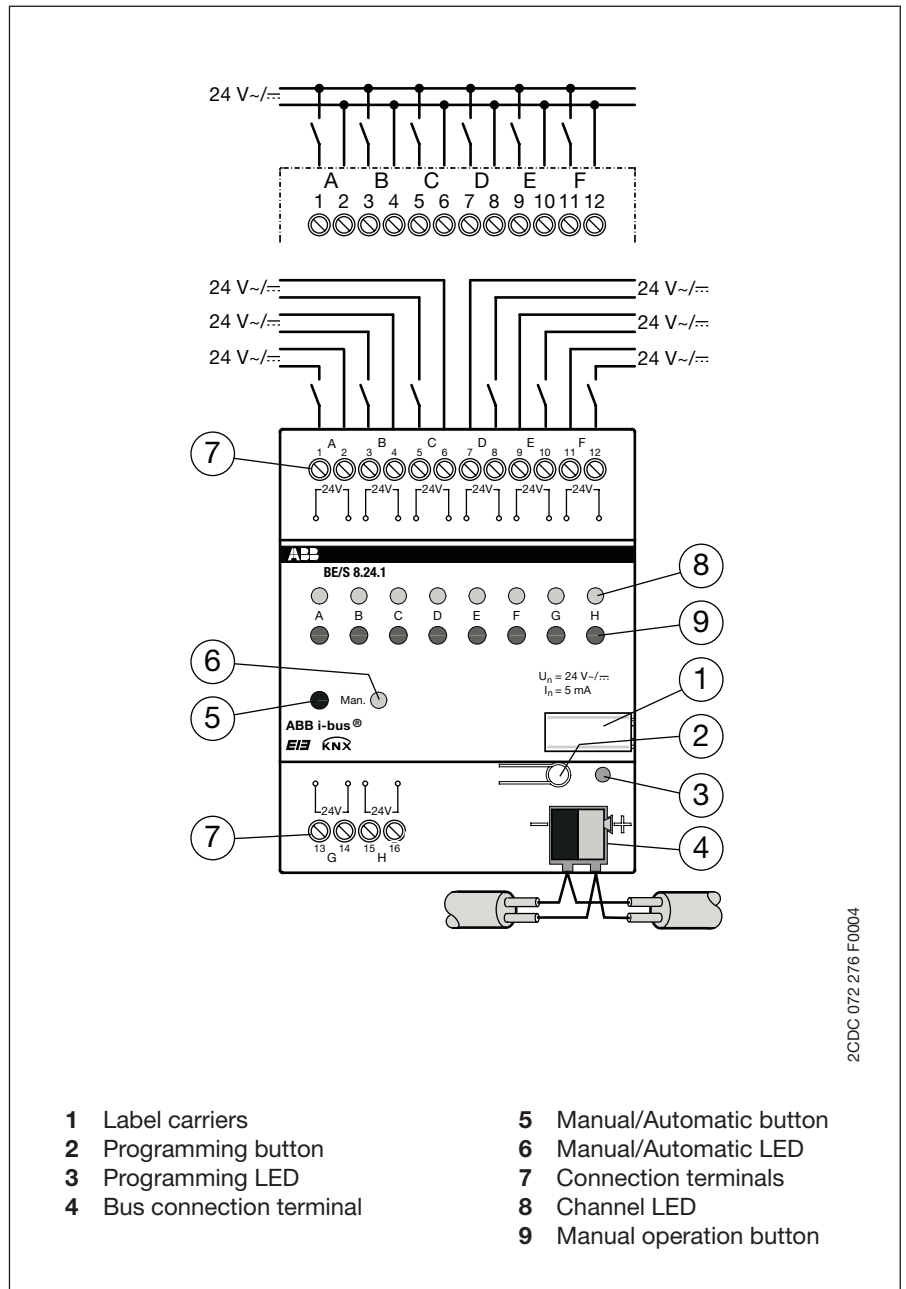

2CDC 072 276 F0004

Dimension drawing

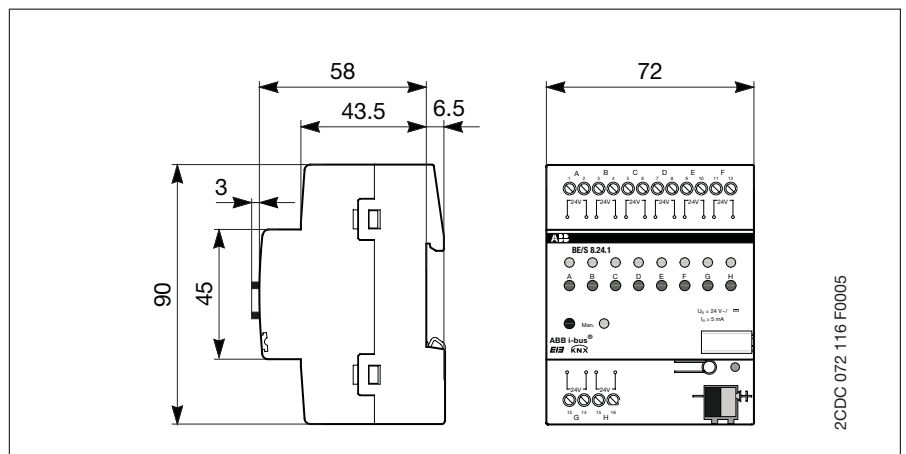

2CDC 072 116 F0005

ABB i-bus® EIB / KNX

Binary Input with manual operation,
8-fold, 24 V AC/DC, MDRC
BE/S 8.24.1, 2CDG 110 055 R0011

5

5