

# ProgramaCube® KSPU Series Timing Module

3



US Patent 6708135



- Choose 1 of 14 Standard Functions
- Special Time Ranges and Functions Available
- Factory Programmed
- Microcontroller Circuitry, +/-0.1% Repeat Accuracy
- Solid State Output 1 A Steady, 10 A Inrush
- Accurate Switch Adjustment
- 12 ... 240 V in 3 Ranges
- Delays from 100 ms...1023 h in 6 ranges
- Counts to 1023 in 3 Ranges


Approvals:



## Description

The KSPU Series is a factory programmed module available in any 1 of 14 standard functions. The KSPU offers a single adjustable timer or counter function. Modules are manufactured without the function assigned. When an order is received, the function software is added. This approach provides fast delivery on all part numbers. Switch adjustment allows accurate selection of the time delay or number of counts the first time and every time. The 1 A steady, 10 A inrush rated solid state output provides 100 million operations, typical. Its microcontroller timing circuit provides excellent repeat accuracy and stability. Encapsulation protects against shock, vibration, and humidity. The KSPU Series is a cost effective approach for OEM applications that require small size, solid state reliability, and accurate switch adjustment. Special time ranges and functions are available; contact Technical Assistance (see below) for more information.


## Connection

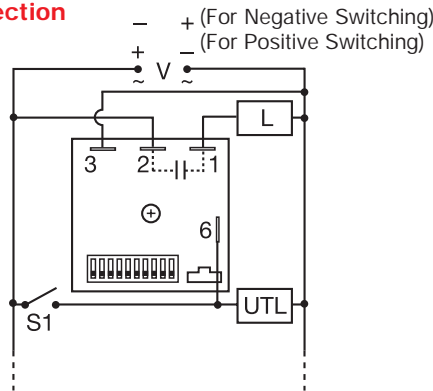

V = Voltage S1 = Initiate Switch  
L = Load UTL = Untimed Load

The untimed load is optional. S1 is not used for some functions. Dashed lines are internal connections.

## Mechanical View

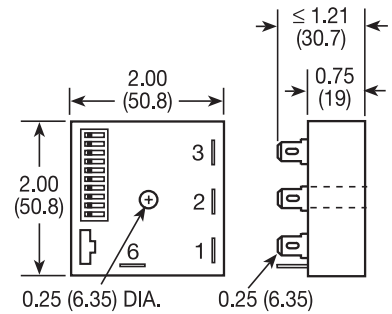

Inches (Millimeters)

## Switch Adjustment

Adjustment Switch Operation	
TIME DELAY	COUNTER
0.1...102.3	1...165
1...1023	1...63
OFF ▶ ON	OFF ▶ ON
0.1	1
0.2	2
0.4	4
0.8	8
1.6	16
3.2	32
6.4	64
12.8	128
25.6	256
51.2	512
6.3	57 counts
544	44 s Delay 2 counts to Start


One or more switches must be ON for proper operation.

## \*\*Function Chart

Delay on Make	<b>M</b>
Delay on Break	<b>B</b>
Recycle (ON Time First, Equal Times)	<b>RE</b>
Recycle (OFF Time First, Equal Times)	<b>RD</b>
Single Shot	<b>S, SD</b>
Interval	<b>I</b>
Trailing Edge Single Shot	<b>TS</b>
Inverted Single Shot	<b>US</b>
Inverted Delay on Break	<b>UB</b>
Accumulative Delay on Make	<b>AM</b>
Motion Detector/Retriggerable	
Single Shot	<b>PSD</b>
Counter/Pulsed Output	<b>C</b>
Counter/Interval Output	<b>CI</b>

For a Complete List of Functions with Descriptions, see Timer Function Section.


## Accessories



Quick connect to screw adaptor  
P/N: P1015-18



Female quick connect  
P/Ns:  
P1015-64 (AWG 14/16)  
P1015-14 (AWG 18/22)



DIN rail P/Ns:  
017322005 (Steel)  
C103PM (Al)

DIN rail adaptor  
P/N: P1023-20

See accessory pages for specifications.

## Ordering Table

<b>KSPU</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Series</b>	<b>Input</b>	<b>Time Delay/Counts</b>	<b>Function**</b>
<b>A</b>	24 ... 240 V AC	<b>1</b> - 0.1 ... 102.3 s	Specify Function
<b>P</b>	12 ... 120 V DC	<b>2</b> - 1 ... 1023 s	(Refer to Function Chart for Code)
<b>N</b>	12 ... 120 V DC	<b>3</b> - 0.1 ... 102.3 m	
	Positive Switching	<b>4</b> - 1 ... 1023 m	
	Negative Switching	<b>5</b> - 0.1 ... 102.3 h	
		<b>6</b> - 1 ... 1023 h	
		<b>7</b> - 1 ... 165 counts (straight) w/pulsed output	
		<b>8</b> - 1 ... 1023 counts (binary) w/pulsed output	
		<b>9</b> - 1 ... 7 counts to start 1 ... 63 s or m interval time	

Example P/N: **KSPUA2RE**

# ProgramaCube® KSPU Series Timing Module

## Technical Data

<b>Time Delay</b> Type Range  Repeat Accuracy Setting Accuracy Reset Time Initiate Time Time Delay / Temp. & Voltage Count Range Count Rate	Microcontroller circuitry 0.1 ... 102.3 s, m or h in 0.1 s, m or h increments 1 ... 1023 s, m or h in 1 s, m or h increments 1 ... 63 s or m in 1 s or m increments +/-0.1% or 20 ms, whichever is greater ≤ +/-1% or 20 ms, whichever is greater ≤ 150 ms ≤ 20 ms ≤ +/-2% 1 ... 1023 in 3 ranges ≤ 25 counts per second	<b>Protection</b> Circuitry Dielectric Breakdown Insulation Resistance Polarity	Encapsulated ≥ 2000 V RMS terminals to mounting surface ≥ 100 MΩ DC units are reverse polarity protected
<b>Input</b> Voltage Tolerance Frequency/DC Ripple Power Consumption	12 ... 120 V DC; 24 ... 240 V AC ≤ +/-15% 50 ... 60 Hz / ≤ 10% AC ≤ 2 VA; DC ≤ 1 W	<b>Mechanical</b> Mounting Package Termination	Surface mt. with one #10 (M5 x 0.8) screw 2 x 2 x 1.21 in. (50.8 x 50.8 x 30.7 mm) 0.25 in. (6.35 mm) male quick connects
<b>Output</b> Type Rating Voltage Drop OFF State Leakage Current Counter Output (P/N Variable 7 & 8)	Solid state output 1 A steady, 10 A inrush for 16 ms AC ≅ 2.5 V at 1 A; DC ≅ 1 V at 1A AC ≅ 5 mA at 240 V AC; DC ≅ 1mA Output Pulse width: 300 ms +/-20%	<b>Environmental</b> Operating Temp. Storage Temp. Humidity Weight	-40°C ... +60°C -40°C ... +85°C 95% relative, non-condensing ≅ 2.4 oz (68 g)

### Function Diagrams

For a Complete List of Functions with Descriptions, see Timer Function Section.

