



Distribution transformers

# Micro-pole overhead transformers 1- 3 kVA, single phase, outdoor

# Product overview

## Application

ABB Micro-Pole single phase overhead transformers (Control voltage transformers) are ideal for small load applications such as providing control power for capacitor bank switches, recloser installations, switchgear control power, billboard lighting, intersection stoplights, street lighting pumping stations and other applications.

## Advantages

- Small, light weight designs, will provide for easy handling and installation and require less pole space.
- Reduced system losses by substituting for under-utilized higher kVA units in light-load applications.
- The same quality and reliability expected of all ABB distribution transformers.

## Ratings

- Power (kVA): 1 - 3
- High Voltage (V): 600 - 22900
- Low Voltage (V): 120 , 120/240 or 250
- Frequency (Hz): 60 or 50
- Temperature Rise: 65 degree C.
- Weight (lbs.): 80 to 90

## Basic Impulse Insulation Levels (BIL)

HV Rating (V)	BIL Winding (kV)	BIL Bushing (kV)
600-4800	75	95
6900-8320	95	95
9960-22900	125	125

## Options


- High voltage wildlife protective cap(s).
- Low voltage 5-pin connector.
- Primary protective fuse link.
- Stainless steel tank.
- Arrestor bracket.
- Two hanger bracket.

## Standard features

- The micro-pole transformer design is based on IEEE Std. C57.12.00, IEEE Std. C57.12.90 and CSA C2.2-06
- One or two high voltage bushing(s).
- Two low voltage bushings each with an one eyebolt connector for #6 solid to 250MCM str. AL or CU conductor.
- One Type A hanger bracket as described in ANSI Std. C57.12.20.
- One tank grounding connector suitable for #10 solid to #1 str. AL or CU conductor.
- Pressure relief valve.
- Final paint finish per ANSI Std. C57.12.28.
- Two lifting lugs per the ANSI Std. C57.12.20.
- Secured sealing via multiple cover clamps.



# Outline dimensions

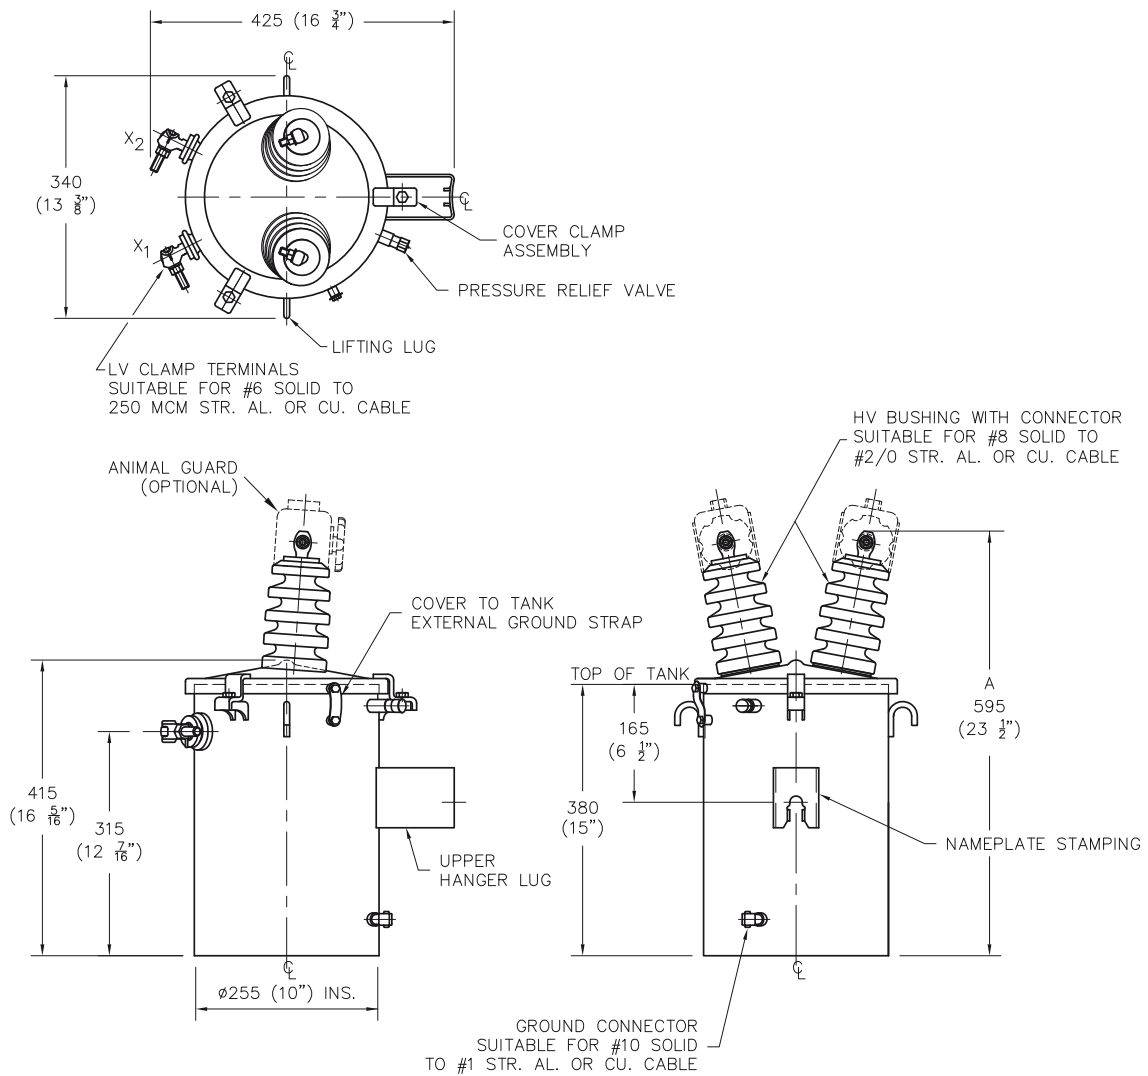

## Bushing

BIL	95k V	125k V
A (inches)	23,5	25,75
A (mm)	595	655

# Contact us

## **ABB Inc.**

### **Pole mounted Distribution Transformers**

500 rue du Binôme.

Québec, (Québec) G1P 4P1 Canada

Phone: +1 418 650 4488

Fax: +1 418 650 2021

[www.abb.com/transformers](http://www.abb.com/transformers)

#### **Note:**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction—in whole or in parts—is forbidden without ABB's prior written consent.

Copyright 2010 ABB.

All rights reserved

1LCA000002-LTE September 2010

Power and productivity  
for a better world™

