

PCM600 Update Manager Update Instruction

Dear Reader,

Below please find information about how to perform the update of the PCM600 Update Manager.


Please note that Protection and control IED manager PCM600 tool will be fully functional all the time and this update has no effect on the performance of the tool functionalities. This Issue is related to PCM600 Update Manager only.

Issue

On Jan 19th 2012 2:00 AM EET, the certificate used to sign Update Manager downloads will expire. Due to this, Update Manager must be updated to be able to download and install files from the update server starting Jan 19th 2012 2:00 AM EET.

For the smooth update we highly recommend performing the update by 2:00 AM EET on January 19th to be able to continue to download and install files from the PCM600 Update Manager.

Downloading new version of Update Manager before January 19th 2012 2:00 AM EET

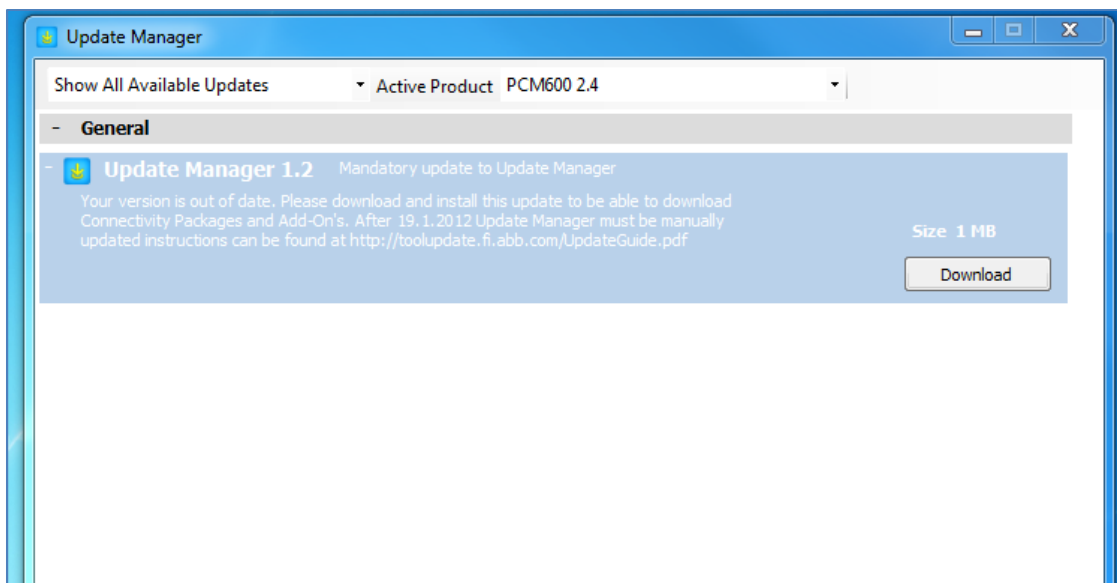

Update Manager can be used to download and install the update.

The update can also be made later but in that case more extensive measures will be required from the user. The instruction below describes the steps that need to be taken to perform update.

Downloading new version of Update Manager after January 19th 2012 2:00 AM EET

If Update Manager has not been updated before the certificate expires (by January 19th 2012 2:00 AM EET), an error will be displayed when downloading the update and prevent Update Manager from installing it.

ABB Oy
Distribution Automation
P.O.Box 699
FI-65101 Vaasa, Finland
Phone: +358 10 22 11
Fax: +358 10 22 41094

ABB AB
Substation Automation Products
SE-721 59 Västerås, Sweden
Phone: +46 21 35 20 00
Fax: +46 21 14 69 18

Power and productivity
for a better world™




PCM600 Update Manager Update Instruction



Error message once the certificate changes.

This does not mean the download is corrupted; only that Update Manager can no longer verify the integrity of the download. To still install the update follow the steps below.

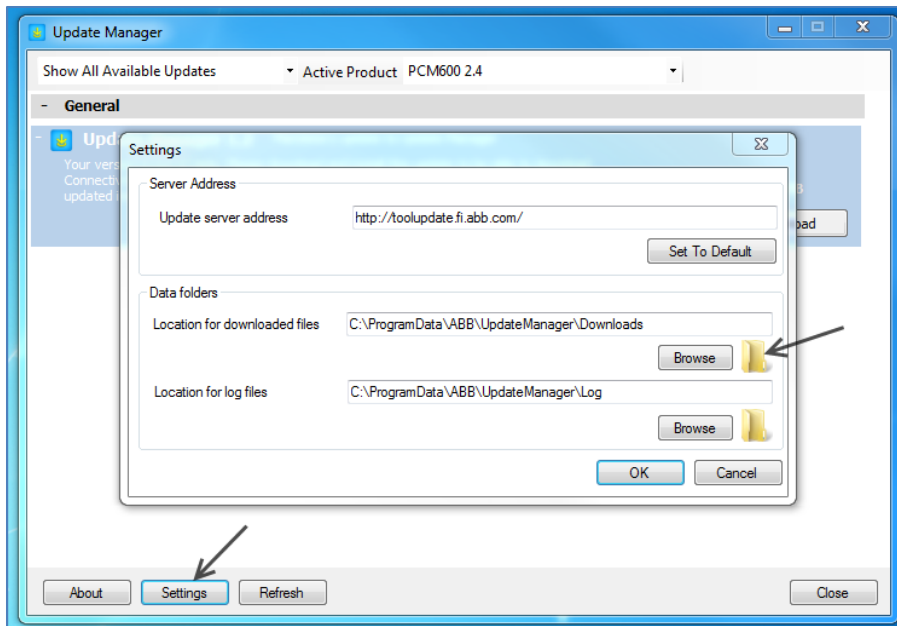


1. *Open Update Manager downloads folder.*

ABB Oy
Distribution Automation
P.O.Box 699
FI-65101 Vaasa, Finland
Phone: +358 10 22 11
Fax: +358 10 22 41094


ABB AB
Substation Automation Products
SE-721 59 Västerås, Sweden
Phone: +46 21 35 20 00
Fax: +46 21 14 69 18

Power and productivity
for a better world™ **ABB**

PCM600 Update Manager Update Instruction

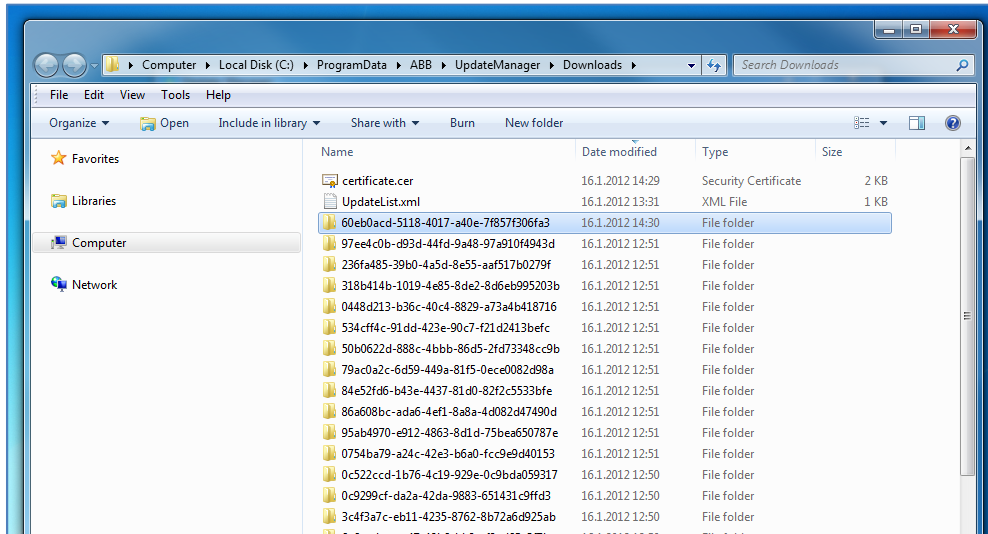

2. Find update named 06eb0acd-5118-4017-a40e-7f857f306fa3, sorting by date may make this easier.

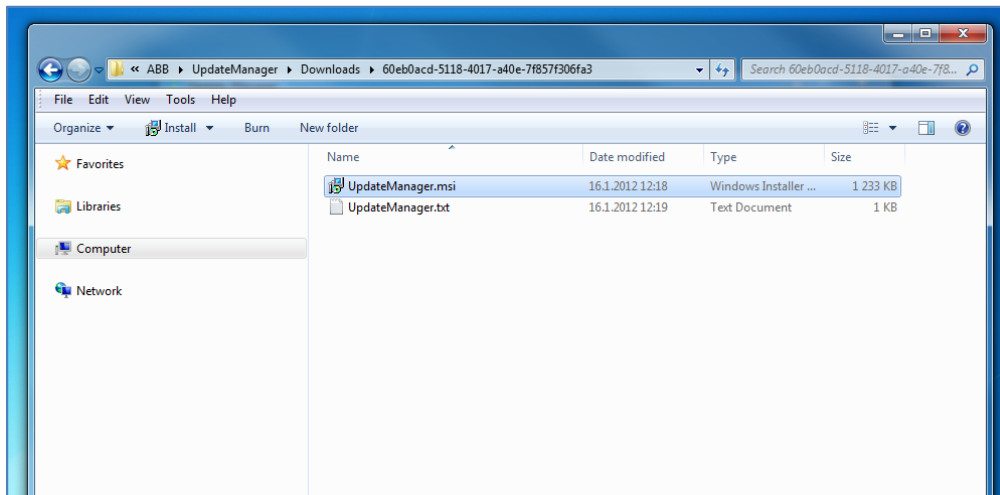

3. Run the MSI installer inside and follow the instructions for installing Update Manager.

Installing Update Manager


When Update Manager is updating it may display a notification that you should close Update Manager, to do so just switch back to the Update Manager window and close it, then click "Retry" on the dialog.

ABB Oy
Distribution Automation
P.O.Box 699
FI-65101 Vaasa, Finland
Phone: +358 10 22 11
Fax: +358 10 22 41094

ABB AB
Substation Automation Products
SE-721 59 Västerås, Sweden
Phone: +46 21 35 20 00
Fax: +46 21 14 69 18

Power and productivity
for a better world™ **ABB**

PCM600 Update Manager Update Instruction

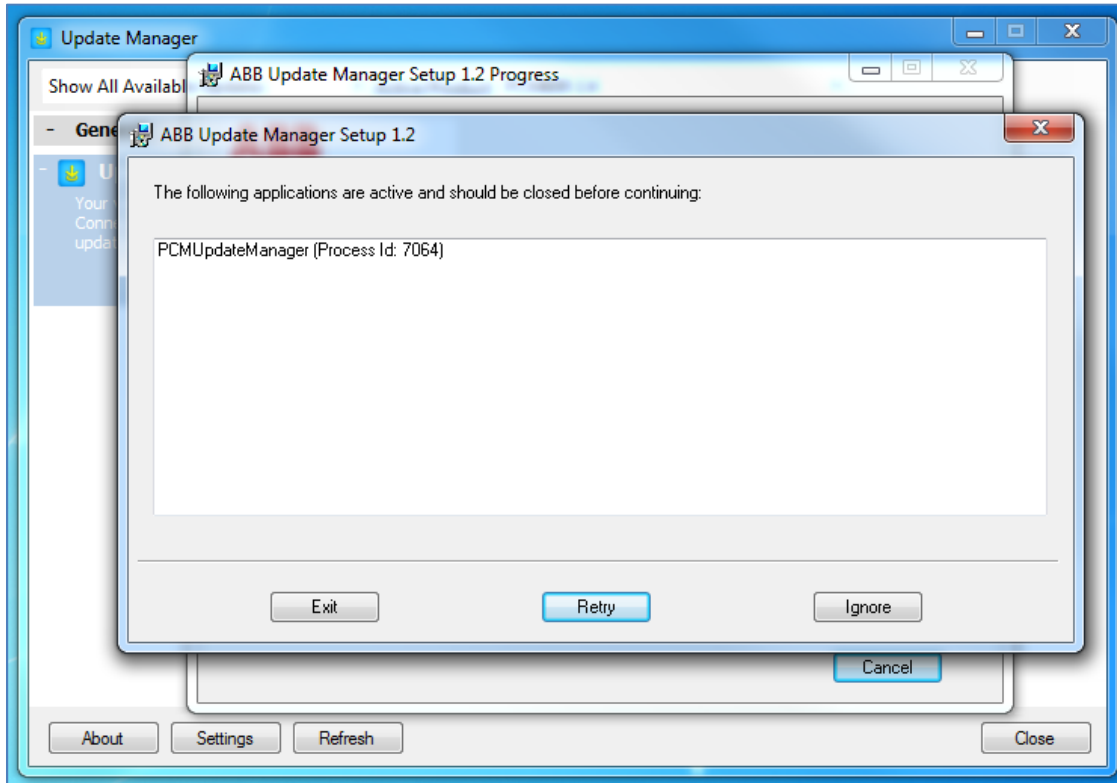

This dialog will open if Update Manager is running.

Update Manager resuming normal use

Once Update Manager has been updated it may be started again and will continue to work as normally. The full list of updates will be available once again.

To check that Update Manager has been updated go to the About dialog and verify that the Version is 2.4.90.0.

Disclaimer

The information in this document is subject to change without notice and should not be construed as a commitment by ABB Oy. ABB Oy assumes no responsibility for any errors that may appear in this document.

© Copyright 2012 ABB Oy

All rights reserved.

Trademarks

ABB is a registered trademark of ABB Group. All other brand or product names mentioned in this document may be trademarks or registered trademarks of their respective holders.

ABB Oy
Distribution Automation
P.O.Box 699
FI-65101 Vaasa, Finland
Phone: +358 10 22 11
Fax: +358 10 22 41094

ABB AB
Substation Automation Products
SE-721 59 Västerås, Sweden
Phone: +46 21 35 20 00
Fax: +46 21 14 69 18

Power and productivity
for a better world™

